

# INFORMATION ONLY

## 16089E-01

# S E R V I C E N O T E

Supersedes:  
None

## 16089E – Kelvin IC Clip Lead

Serial Numbers: ALL

16089E Kelvin Clip Lead - Semi Opaque “Rubber band” Replacement Part.

### Parts Required:

P/N	Description	Qty.
8710-2158	Clip	1

## ADMINISTRATIVE INFORMATION

SERVICE NOTE CLASSIFICATION:	
<b>INFORMATION ONLY</b>	
<input type="checkbox"/> Calibration Required <b>X Calibration NOT Required</b>	PRODUCT LINE: WN AUTHOR: LS
ADDITIONAL INFORMATION: This service note provide the lower cost replacement PN for the wear and tear semi-opaque “rubber band” which the two clips are held together.	

**Situation:**

This service note provide the lower cost replacement for the wear and tear semi-opaque “rubber band” which the two clips are held together.

**Solution/Action:**

The official recommended product support plan for 16089E is fixture assembly replacement - Kelvin Clip leads replacement.

There is no separate replaceable PN of the rubber band since it belongs to the Clip assembly.

Due to the increasing popular demand on getting the rubber band replaced separately, the lower priced alternative replaceable sub-assembly SPO support part is offered.

Keysight PN is **8710-2158** Clip.

With the new clip on hand, remove the semi-opaque rubber band from the new clip(s) in replacing the worn out/ torn rubber band of the old clip(s). Purchase **8710-2158** (Qty. 2) in replacing the two worn out/ torn rubber bands for each 16089E.

Shown in figure 1-1 is the sample image of **8710-2158** Clip for reference only. Heat shrink tubing 0890-2295 (black color) and 0890-2296 (red color) are not included. It is not recommended to replace the whole clip since the clip replacement requires soldering.

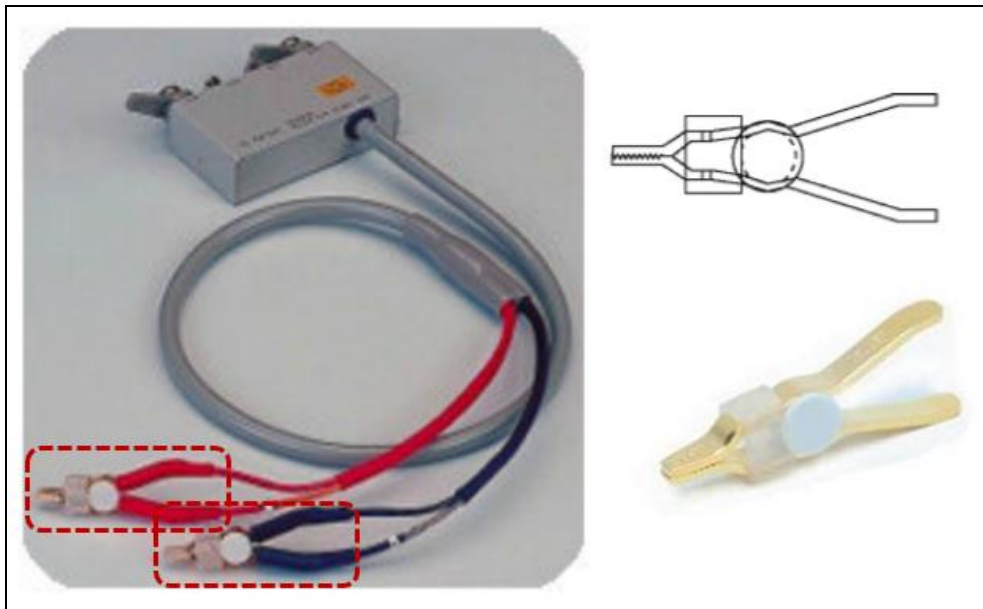


Figure 1-1 Clip

**Revision History:**

Service note Revision	Date	Author	Reason For Change
16089E-01	29 April 2015	ls	As published