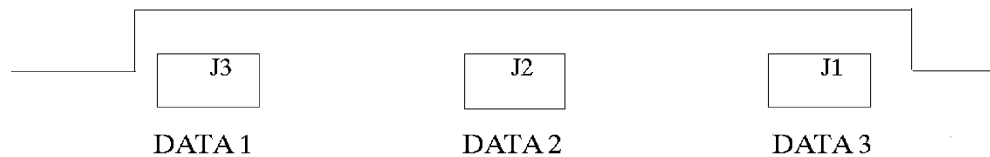
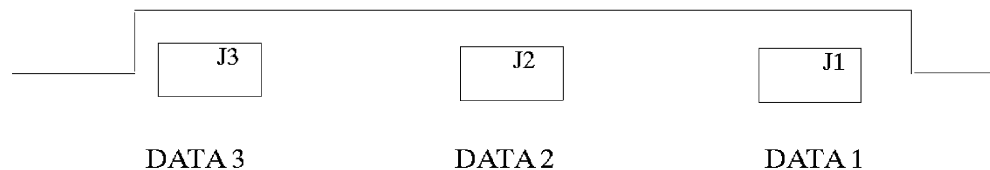


S E R V I C E N O T E

SUPERSEDES: NONE

3764A Digital Transmission Analyzer**Serial Numbers:** 2322U00101 / 9999U99999**Situation:**

On some 3764A Option 003 instruments, connectors J1 and J3 on 03764-60176 Assembly may have been wrongly marked (Figure 1). This would result in the signals from DATA O/P 1 and DATA O/P 3 being crossed. Figure 2 shows correctly marked boards.

**Figure 1. Wrongly Marked Board****Figure 2. Correctly Marked Board***Continued*

DATE: 1 June 1991

ADMINISTRATIVE INFORMATION

SERVICE NOTE CLASSIFICATION:

INFORMATION ONLY

AUTHOR:

JH

ENTITY:

1400

ADDITIONAL INFORMATION:

Solution/Action:

Ensure that the rear panel DATA O/P 1 is connected to J1 and DATA O/P 3 is connected to J3 on the 03764-60176 Assembly.