E8362BH85-06A

S E R V I C E N O T E

Supersedes: E8362BH85-06

E8362BH85 PNA Series RF Network Analyzers

Serial Numbers: 0000A00000/MY47020122

Add-on mechanical components to enhance instrument reliability.

This optional modification is chargeable to customer warranty only if done concurrently with other instrument repairs in an Agilent service facility.

Parts Required:

Turus requireus			
P/N	Description	Qty.	
Enhancement No.1	(Applies to all models and options)	-	
E8364-00021	Ribbon Cable Clamp	1	
0515-0374	Screw, M3.0x10mm, Pan Head	1	
Enhancement No.2	(Applies to all models and options)		
E8361-20067	Retainer Clip	2	
0515-1644	Machine Screw, M3.0 x 12mm		
	Flat Head (For Retainer Clip)	2	
Enhancement No.3	(Applies to all models and options)		
0515-2799	Patch-lock Screw, M3.0x 10mm		
	Pan Head (For Cable Hold		
	Wire)	2	
3050-0891	Flat Washer (For Patch-lock		
	Screw)	2	

ADMINISTRATIVE INFORMATION

SERVICE NOTE CLASSIFICATION:			
MODIFICATION AVAILABLE			
ACTION CATEGORY::	AGREEABLE TIME	X PERFORMANCE ENHANCEMENT X SERVICE / RELIABILITY ENHANCEMENT	
LOCATION CATEGORY:	V CEDVICE CENTED	AVAILABILITY: Support Life	
AUTHOR: DYCS	X SERVICE CENTER	PRODUCT LINE: WN	

ADDITIONAL INFORMATION: **To Be Performed By: Agilent-qualified personnel or customer with specific product repair knowledge – requires instrument disassembly and component replacement.** This service note (written May 13, 2008) applies to all E8362BH85 being manufactured before serial number MY47020123. This Service Note must go along together with the instrument model Service Guide during modification.

© AGILENT TECHNOLOGIES, INC. 2009 PRINTED IN U.S.A.



December 1, 2009

Rev. 16

Page 2 of 10 E8362BH85-06A

Situation:

Further design review has suggested the addition of a clamping mechanism to ensure that the 8121-0118 ribbon cable can not vibrate loose from the Test Set Motherboard connector during extreme handling.

New clamps and locking screws are being added to ensure that those printed circuit assemblies can not vibrate loose from their connectors during extreme handling.

Solution/Action:

Enhancement No.1 (Applies to all Options)

1. Required Tool for Ribbon Cable Clamp

a. Gather a standard 10 lb-in breakaway wrench (used for semi-rigid cables).



b. Remove the open end head by loosening set screw. It will be replaced with L-Key shown below.




c. Secure and orient the L-Key to the breakaway handle




2. Ribbon Cable Clamp Installation Instructions

 Remove and discard existing screw near ribbon cable connector on System Motherboard. See below. Page 3 of 10 E8362BH85-06A

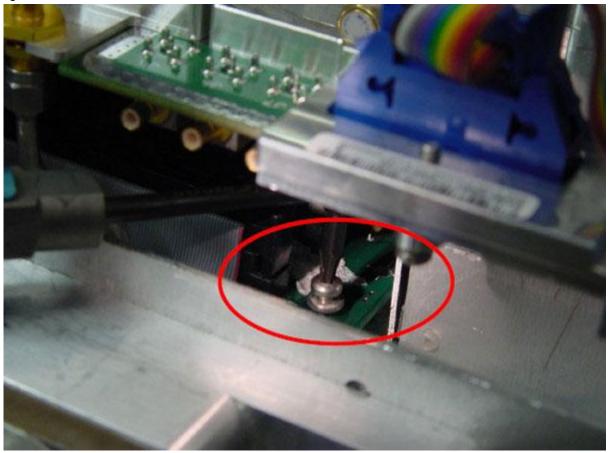

b. Insert Ribbon Cable Clamp under Source Assembly as shown.

Page 4 of 10 E8362BH85-06A

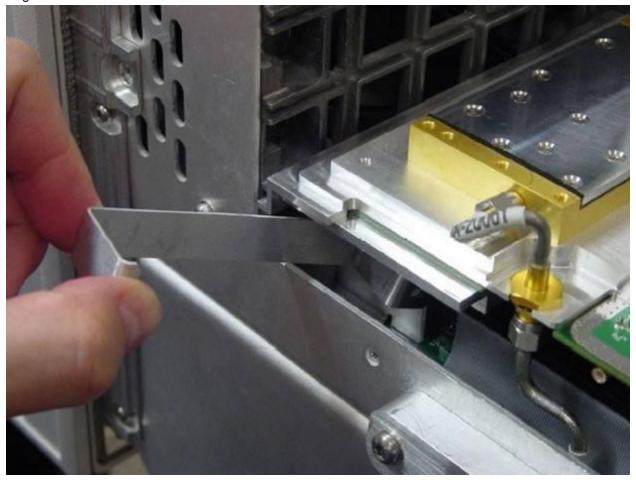


c. Position the clamp over the Ribbon Connector. Use needle nose pliers if necessary to slide the clamp into place. Ensure that the edge of the clamp is parallel to the connector and not skewed.



NOTE: Ensure that the Clamp Lip is secured BELOW the edge of the System Motherboard

Page 5 of 10 E8362BH85-06A

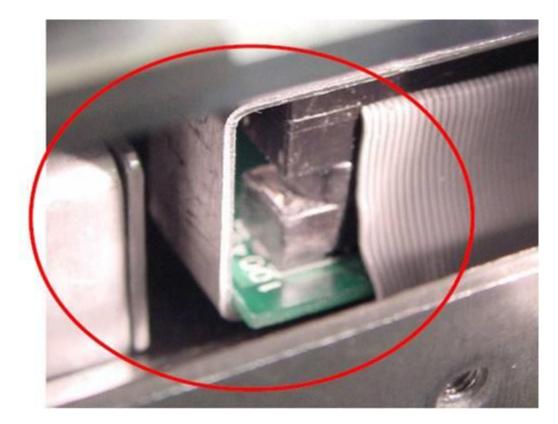


d. Using tweezers, install a new 0515-0374 screw through the hole in the bracket.



e. Use a nut runner tool (T-316130) or alternatively a clean erasure end of a pencil to help run the screw.

Page 6 of 10 E8362BH85-06A



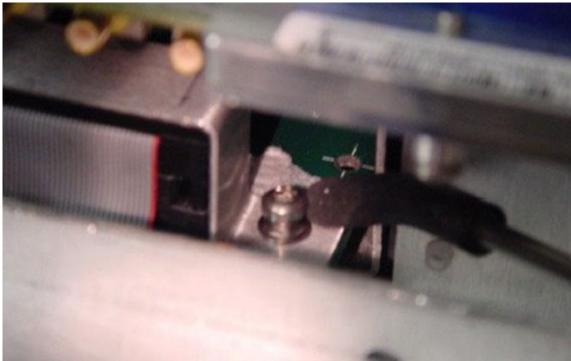


f. Secure screw using the modified 10 lb-in breakaway wrench.

Page 7 of 10 E8362BH85-06A




g. This image shows the final position of the secured clamp.

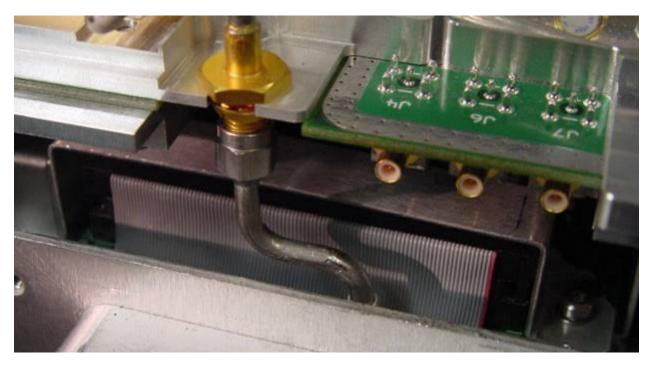


Page 8 of 10 E8362BH85-06A

The Clip Retainer (E8361-20067) to be secured with Flat Head screw (0515-1644) in 2 places at 9 lb-in. This Retainer Clip may naturally rotate a bit when being secured, which is acceptable. Note that the existing screw needs to be removed and discarded prior installing Retainer Clip #1 (shown below in Figure 2a, 2b, and 3).



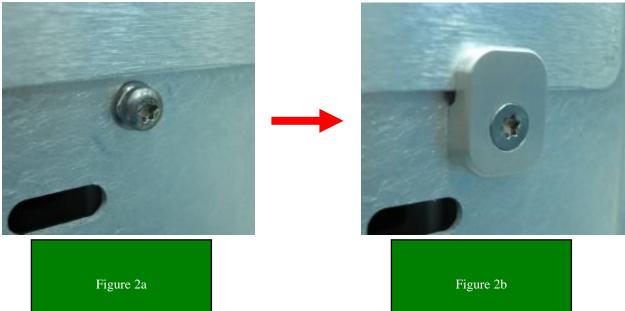

Page 9 of 10 E8362BH85-06A

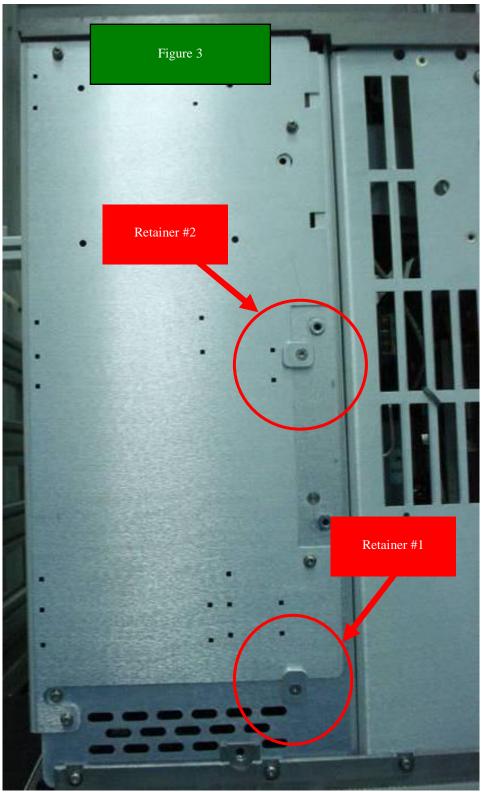

Page 10 of 10 E8362BH85-06A

The Patch-Lock Screw (0515-2799) and Flat Washer (3050-0891) to be used in 2 places and secured at 9 lb-in. These parts will replace existing screw (0515-0374) used in Step 3 and Step 4 (as shown in Figure 2) to secure the Phase Lock Board (E8364-60137).



Figure 1:
Patch-Lock Screw (0515-2799)
And
Flat Washer (3050-0891)

